

The material receivers of the LDM series completely made of stainless steel and the material receivers of LDX series with a Pyrex-glass body were designed to be used with three-phase hopper loaders of the PD series.
There are 8 models from 2 dm³ to 200 dm³.



TECHNICAL SPECIFICATIONS:



- Stainless steel structure.
- Hinged cover.
- High-vacuum operation.
- Automatic filter cleaning.
- Flap-type outlet valve and wear-resistant gasket.
- Air vent with door and integrated metal filter.

ACCESSORIES:

- Pneumatic discharge.
- Proportioning valve.
- Level sensor.

ADDED VALUE:

- Easy to use.
- Easy cleaning and maintenance.
- Safe and reliable.
- Fast installation with a 360° orientation.
- Status indicator.

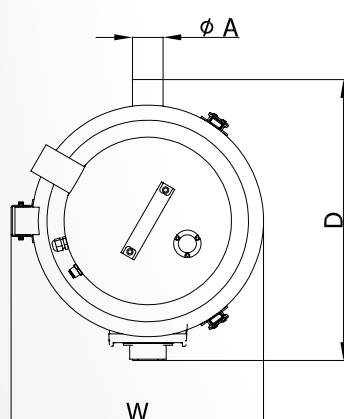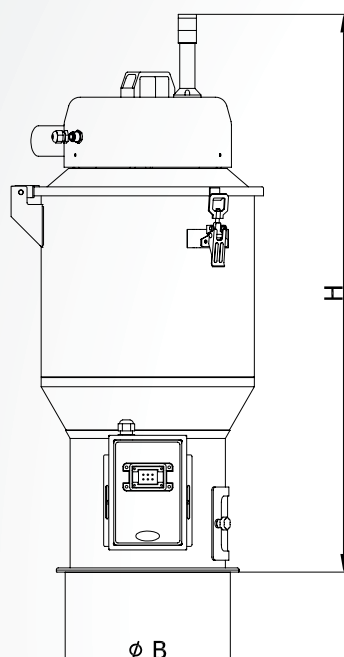

LDM containers



LDX containers

TECHNICAL DATA			LDM2	LDM4	LDX4*	LDM5	LDX8*	LDM10	LDM25	LDX25*	LDM50	LDM100
Capacity		dm ³	2	4	4	5	8	10	25	25	50	100
Centre-to-centre distance B		mm	210	210	210	280	210	280	280	280	280	280
Material inlet diameter A		mm	40/50	40/50	40	40/50	40/50	40/50	50/60	60	60/70	60/70/90
Dimensions	W		268	268	301	413	301	413	414	391	414	568
	D	mm	339	339	308	339	308	339	438	391	511	592
	H		505	586	686	597	810	753	915	956	1085	1192
Weight		kg	7	8	8	10	11	12	15	15	17	25

* Version with glass cylinder